



Filter Series – UF-5 ***Ultra Filtration System***

Stage 1 – Sediment Pre-filter

The sediment pre-filter is used to remove larger particles from the water such as sand and rust. This filter also assists in prolonging the life of the UF membrane.

Stage 2 & 3 – Carbon Filters

The 2nd stage (activated carbon granular filter) and the 3rd stage (activated carbon block filter) work to remove chlorine, bad taste and odors from the water.

Stage 4 – UF Membrane

The UF membrane does not allow particles that are larger than .02 micron to pass through; trapping the contaminants in the filter.

Stage 5 – Final Polish

This filter ensures good tasting water with the removal of any traces of bad taste or odor, leaving you with great tasting water right from your tap.

Filter Maintenance

Pre-filter Service Capacity	800 - 1000 gallons
UF Membrane Service Capacity	2000 - 2500 gallons


Flow Rate

Service PSI range 22-40	0.5 GPM
-------------------------	---------

Operation

Working Feed Pressure	22 - 43 PSI
Working Temperature	40°F - 100°F

Our highly qualified Hanksraft *elements* dealers will be happy to recommend the correct system that fits your needs.

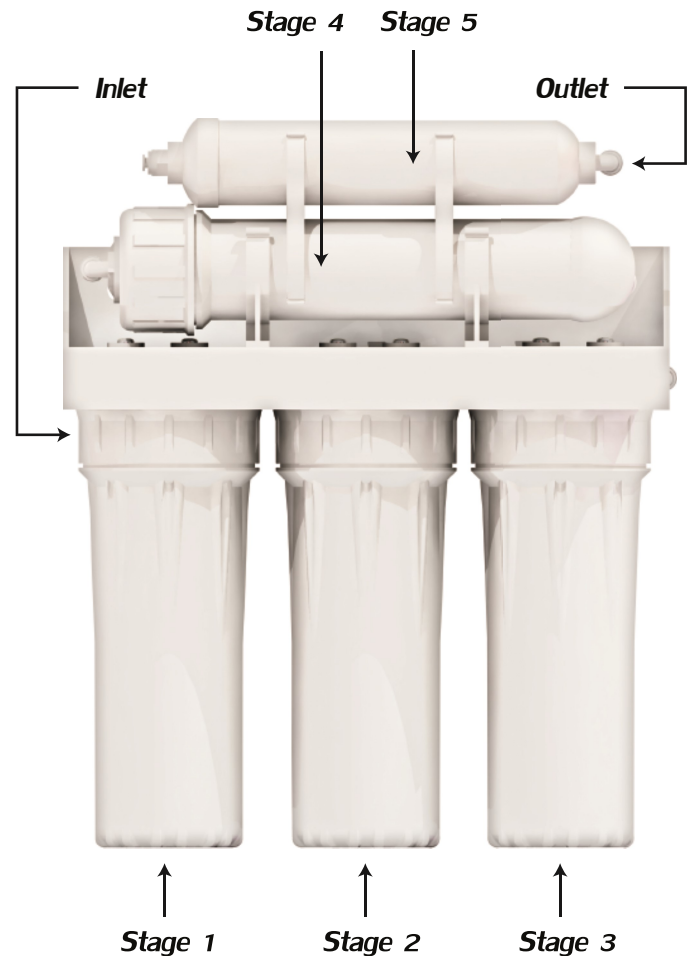

**For under \$300 you can
eliminate bottled water.**



AquaSure Water Treatment

1121 Empress St. Winnipeg MB R3E 3H1
Phone: 632.1385 or 1.866.467.7737
Email: aquasure@mts.net
Website: www.aquasurewater.ca